



"FF12D24UN" FAN FILTER

Description: **Fan Filter 24 Vd.c.**

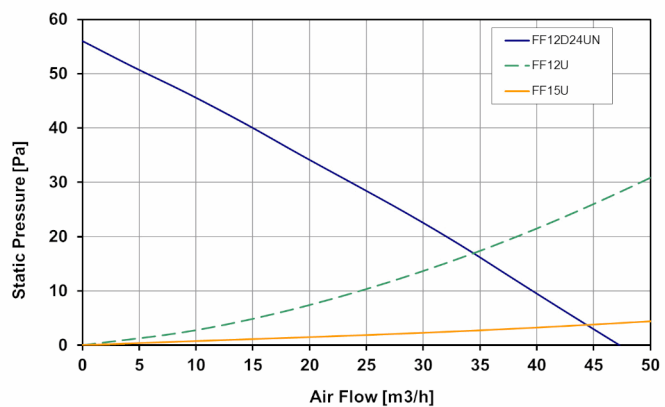

Type of material:	PC/ABS Alloy, PA 66 GF13 HSL for elastic clips
Standard color:	RAL 7035, other colors on request
Protection degree:	IP54, according to EN 60529 Std Type 12 according to UL 508 Std
Fixing system:	by elastic clips
Plate thickness:	from 1.3 mm to 3.2 mm
Operating temperature:	from -10°C to +55°C
Storage temperature:	from -40°C to +70°C
Lifetime L10 at 25°C:	100,000 h
Motor protection:	IC Protected
Electrical connection:	by screwless terminal block 2 poles 2.5 mm ² (20 - 14 AWG)
Appliance class:	class III
Type of filter media:	thermo-linked progressive structure synthetic fibre
Filtering class:	class G3, according to EN 779
Degree of separation:	85% - DIN 24185
Dust retention capacity:	600 g/m ²
Note:	filter media is washable about 10 times
Weight:	0.5 Kg
Approvals:	CE; UL E237844; CSA

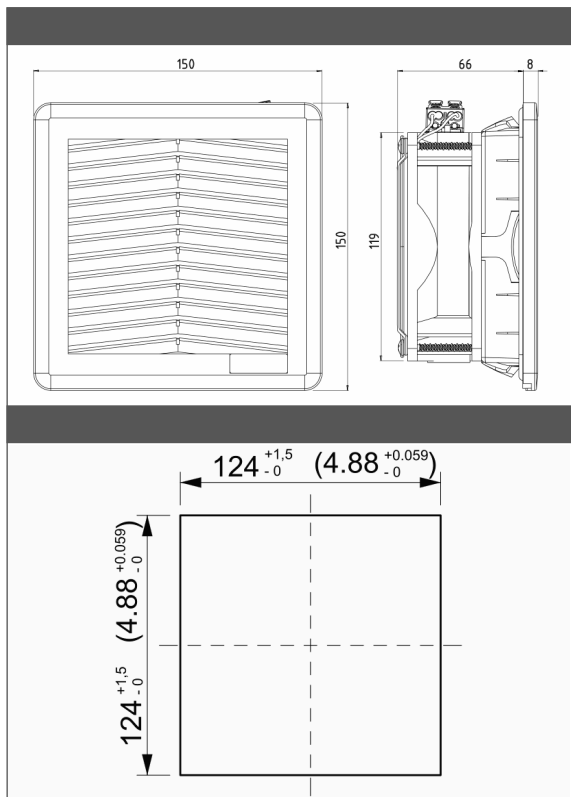

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m ³ /h)	(Pa)	[db(A)]	(°C)	
FF12D24UN	24 V d.c.	-	0.310	7.4	47	56	42.5	-10 ÷ +55	CE; UR; cCSAus; cULus

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

Kontaktaten für Anfragen und Bestellungen:

MBI GmbH • Ubstadter Pfad 5 • 76694 Forst

Tel. 0049 7251/3020408 • Fax 0049 7251/3020409 • E-Mail: info@mbi-gmbh.de • Web: www.mbi-gmbh.de

Brand: FANDIS