

The background of the central section is a photograph of a large industrial factory floor. The floor is filled with rows of complex machinery, likely for manufacturing or testing. The machines are light-colored, possibly white or light blue, and have various components like pipes, wires, and control panels. The perspective is from the end of a long aisle, looking down the center. The ceiling is high with several large, circular industrial lights. The entire image is overlaid with a semi-transparent blue filter, which makes the text stand out while still showing the details of the factory environment.

Katalogauszug Smart EVE-H

Smart - Indoor

Condizionatori da Parete - Wall Mounted A/C - Wandklimageräte - Aires Acondicionados para Montaje en la Pared

Caratteristiche Generali

- Installazione orizzontale
- Capacità frigorifera: 420W
- Alimentazione 230 50/60 Hz
- Termostato meccanico

General Features

- Horizontal installation
- Cooling capacity 420 W
- Power Supply 230 50/60 Hz
- Mechanical thermostat

Allgemeine Merkmale

- Horizontale Installation
- Kälteleistung 420 W
- Spannungsversorgung 230V 50/60Hz
- Mechanisches Thermostat

Características Generales

- Instalación horizontal
- Capacidad frigorífica: 420W
- Alimentación 230 50/60 Hz
- Termostato mecánico



OPTIONAL

CODICE - CODE - ARTIKELNUMMER - CODIGO	Colore Speciale - Special Colour Sonderfarbe - Color especial	Carpenteria - Housing - Gehäuse - Caja INOX AISI304
EVE03H	OCAVNS02	OCAVISM

Certificazioni - Certifications - Zertifizierungen - Certificaciones

- CE
- EAC





EVEo3H



CODICE - CODE - ARTIKELNUMMER - CÒDIGO		M.U.	EVEo3H3220
Tensione nominale - Rated voltage - Nennspannung - Tensión nominal		V, ~	230 . 1
Frequenza nominale - Nominal frequency - Nennfrequenz - Frecuencia nominal		Hz	50/60
Potenza frigorifera - Cooling capacity - Kühlleistung - Potencia frigorífica	L35L35	W	420
Potenza frigorifera - Cooling capacity - Kühlleistung - Potencia frigorífica	L35L50	W	280
Potenza assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida	L35L50	W	300
Corrente assorbita - Current consumption - Stromaufnahme - Corriente absorbida	CE, L35L35	A	1.2
Corrente di avviamento - Start-up current - Anlaufstrom - Corriente de puesta en marcha	CE	A	3
Taratura del dispositivo di protezione - Protection device calibration - Kalibrierung der Schutzeinrichtung - Calibración del dispositivo de protección	CE	A	2
Temp. interne di funzionamento - Internal operating temp. - Interne Betriebstemperatur - Temp. internas de funcionamiento	min/ max	°C	+25 / +45
Temp. esterne di funzionamento - External operating temp - Externe Betriebstemperatur - Temp. externas de funcionamiento	min/ max	°C	+20 / +55
Grado di protezione circuito interno - Internal circuit protection rating - Schutzgrad interner Kreislauf - Grado de protección del circuito interno	CE	IP	54
Pressione sonora esterna - External sound pressure - Externer Schalldruck - Presión sonora externa		dB(A)	60
Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Anchura / Profundidad		mm	300 x 500 x 140
Peso - Weight - Gewicht - Peso		kg	17

Smart Layout

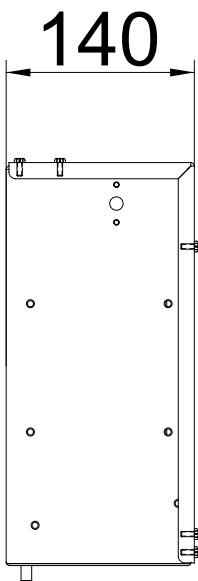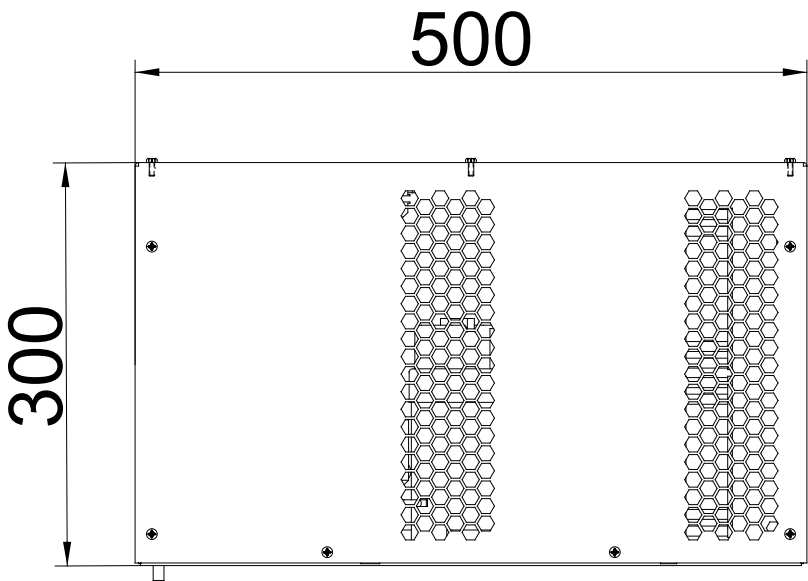



MBI GmbH

Ubstadter Pfad 5
76694 Forst

Telefon: +49 (0) 7251 - 30 20 408
Telefax: +49 (0) 7251 - 30 20 409

E-Mail: info@mbi-gmbh.de
Webseite: www.mbi-gmbh.de