


"FF08AN" SERIES FAN FILTERS

Description: **Fan Filter 115/230 Va.c.**






Type of material:	PC/ABS Alloy, PA 66 GF13 HSL for elastic clips
Standard color:	RAL 7035, other colors on request
Protection degree:	IP54, according to EN 60529 std Type 12, according to UL 508 std
Fixing system:	by elastic clips, otherwise by four self-threading screws
Plate thickness:	from 1 mm to 2 mm
Storage temperature:	from -40°C to +70°C
Motor Lifetime L10 at 20°C (approx.):	50,000 h
Motor protection:	impedance
Earth connection:	(by M4 screw on fan's casing)
Electrical connection:	UL 3266 AWG22 lead wires
Appliance class:	class I
Type of filter media:	thermo-linked progressive structure synthetic fibre
Filtering class:	class G3, according to EN 779
Degree of separation:	85% - DIN 24185
Dust retention capacity:	600 g/m ²
Note:	filter media is washable about 10 times
Weight:	0.391 Kg
Approvals:	CE, UL E237844, CSA

technical drawing (standard flow)

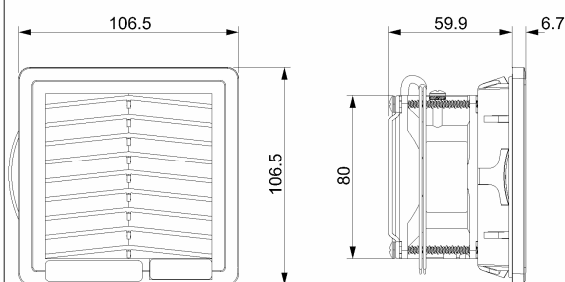

mounting cut-out

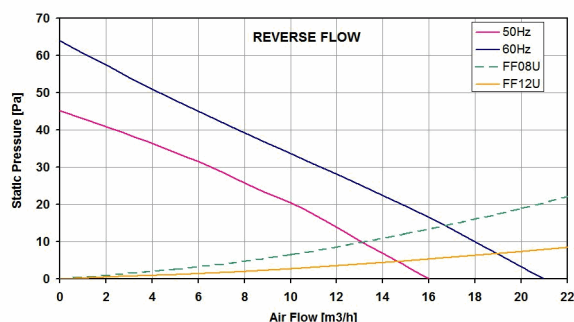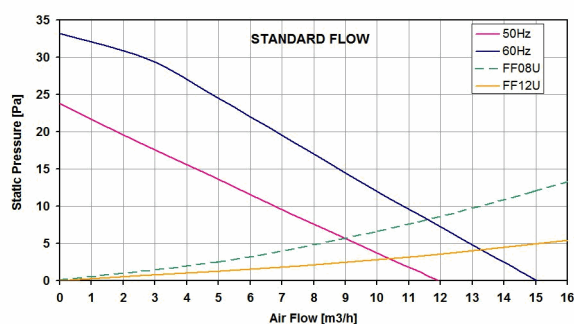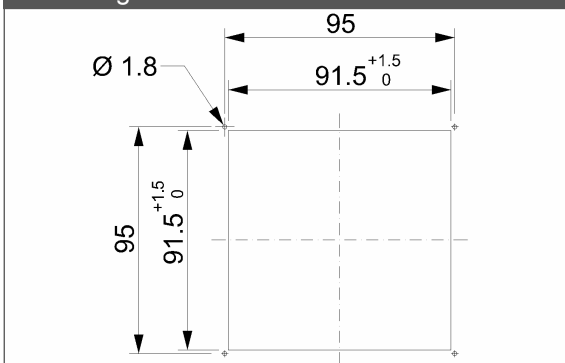

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m3/h)	Static Pressure (Pa)	Fan Noise [db(A)]	Rated Temp. Range (°C)	Approvals
FF08A115UN	115 V a.c.	50/60	0.113/0.092	9.0/7.0	12/15	23/33	31.0/33.0	-10 ÷ +55	CE; cURus; cCSAus
FF08A115UNR	115 V a.c.	50/60	0.111/0.093	9.0/7.5	16/21	45/64	31.0/33.0	-10 ÷ +55	CE; cURus; cCSAus
FF08A230UN	230 V a.c.	50/60	0.062/0.050	10/8.0	12/15	23/33	31.0/33.0	-10 ÷ +55	CE; cURus; cCSAus
FF08A230UNR	230 V a.c.	50/60	0.063/0.052	10/8.0	16/21	45/64	31.0/33.0	-10 ÷ +55	CE; cURus; cCSAus

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.

Technische Änderungen und Irrtümer vorbehalten

Kontaktdaten für Anfragen und Bestellungen:

MBI GmbH • Ubstadter Pfad 5 • 76694 Forst

Tel. 0049 7251/3020408 • Fax 0049 7251/3020409 • E-Mail: info@mbi-gmbh.de • Web: www.mbi-gmbh.de

Brand: FANDIS